

SPECIFICATION

floor-wood

Quality		: VALENCIA
Product definition		: tufted loop pile
Gauge		: 1/10"
No. of tufts	ISO 1763	: $\pm 148400/m^2$
Pile fibre		: 100% PA SDN
Pile weight		: $600 \text{ gr}/m^2 \pm 5\%$
Pile height	ISO 1766	: $2.9 \text{ mm} \pm 5\%$
Primary backing		: PA/PES non-woven - Colback
Tile backing		: Polyflex with a non-woven fabric
Total thickness	ISO 1765	: $6 \text{ mm} \pm 7,5\%$
Total weight		: $4350 \text{ gr}/m^2 \pm 7,5\%$
Tile size		: $50 \times 50 \text{ cm} (\pm 19.7'' \times 19.7'')$
Tiles per box		: 20

PERFORMANCE

Use classification		: Class 33
Castor chair test	EN 985	: A, continues use
Abrasion	EN 1963	: pass
Vettermann test	ISO TR 10361/EN 1471	: pass
Thermal isolation	ISO 8302	: $0.09 \text{ m}^2 \text{ K}/\text{W}$
Dimensional stability	ISO 2551	: pass

ELECTROSTATIC PROPERTIES

Walk on test	ISO 6356	: -0.1 kV
Horizontal electrical resistance	ISO CD 10965	: $8 \times 10^9 \Omega$
Vertical electrical resistance	ISO CD 10965	: $4 \times 10^9 \Omega$
Static loading		: anti-static

FLAME PROPERTIES

Reaction to fire	EN ISO 11925-2	
	EN ISO 9239-1	: $B_{fl} - s1$
Hot metal nut test	BS 4790	: Low Radius

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	: > 5.0
Rubbing, dry	ISO 105 X12	: 4.5
Rubbing, wet	ISO 105 X12	: 5.0
Shampoo	BS 1006	: 4.5
Water	ISO 105 E01	: 5.0
Water stains	TNO W 6024	: 5.0

GENERAL

Recommended maintenance:

Best results are obtained when cleaned with a dry shampoo method.


Pile direction:

Directional arrows are printed on the back of each tile.

Best results are obtained when laid checkerboard.

Laying instructions:

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m^2 it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

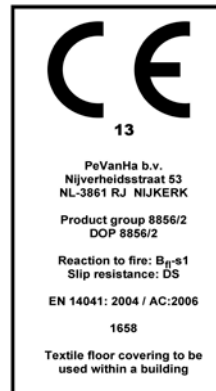

COLOURS

Col. 74
Col. 82
Col. 96

Col. 79	Col. 77
Col. 76	Col. 20
Col. 85	Col. 94