

SPECIFICATION

| | | |
|--------------------|----------|---|
| Quality | | : VERONA |
| Product definition | | : tufted loop pile |
| Gauge | | : 1/10" |
| No. of tufts | ISO 1763 | : $\pm 187.470/m^2$ ($\pm 163043/yard^2$) |
| Pile fibre | | : 100% polypropylene |
| Pile weight | ISO 8543 | : $400\text{ gr}/m^2 \pm 5\%$ ($\pm 10\text{ oz}/yd^2$) |
| Pile height | ISO 1766 | : $2.9\text{ mm} \pm 5\%$ |
| Primary backing | | : PA/PES non-woven |
| Tile backing | | : Polyflex with a non-woven fabric |
| Total thickness | ISO 1765 | : $5.2\text{ mm} \pm 5\%$ |
| Total weight | ISO 8543 | : $3779\text{ gr}/m^2 \pm 7,5\%$ ($\pm 109\text{ oz}/yd^2$) |
| Tile size | | : $50 \times 50\text{ cm}$ ($\pm 19.7'' \times 19.7''$) |
| Tiles per box | | : 20 |

PERFORMANCE

| | | |
|-----------------------|-----------|---------------------------------------|
| Use classification | | : 31 |
| Abrasion | ISO 12951 | : pass |
| Vettermann test | ISO 10361 | : pass |
| Dimensional stability | EN 986 | : pass |
| Thermal isolation | ISO 8302 | : $0.10\text{ m}^2\text{ K}/\text{W}$ |

ELECTROSTATIC PROPERTIES


| | | |
|----------------|--|---------------|
| Static loading | | : anti-static |
|----------------|--|---------------|

FLAME PROPERTIES

| | | |
|--------------------|---------|--------------|
| Hot metal nut test | BS 4790 | : Low Radius |
|--------------------|---------|--------------|

COLOUR FASTNESS PROPERTIES

| | | |
|--------------|-------------|-------|
| Light | ISO 105 B02 | : 4.4 |
| Rubbing, dry | ISO 105 X12 | : 5.0 |
| Rubbing, wet | ISO 105 X12 | : 5.0 |
| Shampoo | BS 1006 | : 4.8 |
| Water | ISO 105 E01 | : 4.8 |

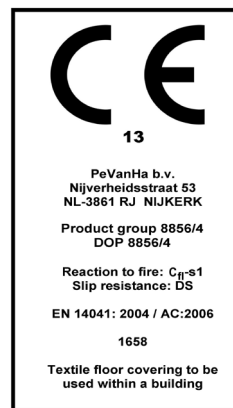

GENERAL

Recommended maintenance:
Pile direction:

Best results are obtained when cleaned with a dry shampoo method.
Directional arrows are printed on the back of each tile.
Best results are obtained when laid checkerboard.

Laying instructions:

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m^2 it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

COLOURS

| | | | | | | |
|-------------------|---------------------|--------------------|---------------------|------------------|----------------------|---------------------|
| 7872 Grey | 7785 Antra / Red | 7285 Marine | 7284 Royal Blue | 7297 Chestnut | 7078 Beige / Grey | |
| 7279 Black | 7782 Antra | 7277 Antra | 8458 Blue / Grey | 7293 Sand | 7242 Green | 7215 Red |
| 7278 Dark Grey | | 7272 Light Grey | | | 7270 Beige | Polyflex Backing |